



04 Analogue Measuring Instruments

ANALOGUE MEASURING INSTRUMENTS

Analogue instruments register a value to be measured and show it on an analogue display, usually by a pointer on a scale. So the value is displayed in a stepless and continuous way. In opposition to digital displays, instabilities and tendencies of a value can be recognized faster and more intuitively on an analogue display. On the other hand at analogue displays exact numerical values are more difficult to read compared to a digital instrument (reading error).

Analogue instruments are on hand for a broad band of electrical values. They are available in the standardized dimensions 48x48mm, 72x72mm, 96x96mm and 144x144mm. Other executions on request.

Technical Features

page 4/1

Alternating Current instruments (AC)

Moving iron instruments (EQ)	page 4/3
Moving coil instruments with rectifier (PR/PAR)	page 4/5
Volt- / Ammeter with switch (EQ SWT-3/-6) (EQ SWT)	page 4/7
Maximum demand indicators (BIQ/ BOQ)	page 4/10
Electronic active /reactive power instrument (DQ/DAQ)	page 4/12
Power factor instrument (DPQ/EPA)	page 4/17
Phase sequence indicators (ISE)	page 4/19
Frequency instruments - Pointer (FA/FAG)	page 4/20
Synchronization instruments (SQ)	page 4/21
Double Voltmeter (EQD)	page 4/22
Double pointer type frequency instruments (FAD)	page 4/23

Direct Current instruments (DC)

Moving coil instruments (PQ)	page 4/24
Contact instruments	page 4/26

ANALOGUE MEASURING INSTRUMENTS

Technical Features

Unless another indication in the instrument, the following specification apply:

Accuracy (according to IEC 60051 and UNE-EN 60051)

Class: as marked on the scale

The accuracy class of an analogue measuring instrument indicates the maximum error expressed in percentage of the full-scale value for any measurement made under the so-called reference conditions. Thus, a 500V voltmeter of class index 1.5 guarantees that its maximum error will be 7.5 V.

Electrical:

Overload (according IEC 60051 and UNE-EN 60051)

- Continuous overload: 1,2 times rated value
- Voltmeters and frequency meters: 2 times Un, 5 seconds (EQ: máx 100 V)
- Ammeters:

10 times In, 1 second for BIQ and BOQ

10 times In, 5 seconds

(máx. 200 A for EQ48n, 250 A for other EQ)

Maximum voltage related to earth (according to IEC and UNE-EN61010-1)

- EQ72n, EQ96n, EQ144n, PQ72n, PQ96n, PQ144n: 600V, measurement category II
- Other instruments: 600V, category II / 300V, category III

Power consumption:

- EQ..n: EQ Ammeter < 15 VA ; < 0.5 VA / > 15 A ; 0.8VA
EQ Voltmeter < 4.5 VA
- PQ..n: Voltmeters: Current 1 mA for ranges up to 1000 V
Ammeters: Voltage drop 60 mV for ranges up to 100 A
- PR..n: Voltmeters < 1 VA
- FA..n: < 7 VA
- BIQ..n: < 2.5 VA
- BOQ..n: < 3.4 VA
- PAQ..n: Voltmeters: Current 1 mA for ranges up to 1000 V
Ammeters: Voltage 60 mV for ranges up to 100 A
- FAG..n: < 7 VA

Constructive:

Housings according to DIN IEC 61554, in VO self-extinguishing thermoplastic material according to UL 94.

Grado de protección parte frontal (según IEC y EN 60529)

- BIQ..n y BOQ..n: IP40
- Other instruments: IP52 - Standard execution
IP54 -Tropical version

Environmental

This instrument is suitable for indoor installations with the following characteristics.

Operation temperature:	-10 ... 55 ° C
Storage temperature:	-25 ... 65 ° C
Reference temperature:	23 ° C
Maximum relative humidity:	80% up to 31°C, decreasing linearly up to 50% at 40°C, and to 25% at 55°C
Altitude:	up to 2000m
Pollution degree:	II (according IEC 61010-1 and UNE-EN 61010-1)
Vibration resistance:	1,5 g a 50 Hz (10-150-10 Hz / 0,15 mm)
Shock resistance:	15 g 11 ms

Housing

Unless otherwise indicated, the housings are flush mounting into panels according to DIN 43718 standard, sizes 48x48, 72x72, 96x96 y 144x144. Made of self-extinguishing plastic material VO according to UL-94.

The window is made of glass. As special executions it can be anti-reflexive glass or unbreakable polycarbonate.

Degree of protection

- IP 52 for EQ/PQ/FA housing front
- IP 40 for BIQ/BOQ housing front
- IP 00 for clamps without electric shock protection
- IP 20 for clamps with electric shock protection

Bezel according to DIN 43718

Narrow bezel, black colour, similar to RAL 9005.

Fixing

Instruments 48n:	2x grip screw
Instruments 72n and 96n:	2x snap closure (plastic clamp)
Instruments 144n:	4x grip screw


Insulation

The nominal circuit voltage (circuit insulation voltage) of measuring instruments is 650 V, withstanding a test voltage of 2 kV, at 50Hz during 1 minute.

ANALOGUE MEASURING INSTRUMENTS

Position

The standard mounting position is standard. The instruments are calibrated - if not indicated differently - for vertical purpose (pos.2). If other mountin positiros are required (horizontal or inclined), please indicate the angle of inclination (see figure).

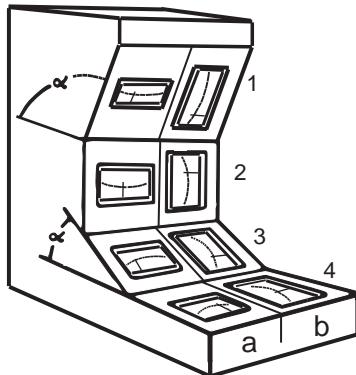

1	$\alpha > 90^\circ$
2	$\perp = 90^\circ$
3	$\alpha < 90^\circ$
4	$\square = 0^\circ$

Scales and Pointers

The scales are made with coarse-fine graduation, according to DIN 43802, in black on white ground. In the drawing, scales are shown for the standard measuring ranges, depending on the scale length. Other divisions, coloured strokes or stripes, additional lettering, double scales, scales with double numbering or executions of the scales and mark in white or yellow on black ground can be made as well as special executions.

The pointers have the same colour as the scale (black), except for maximum demand indicators. For making a determined value on the scale by the user, we provide instruments with a front adjustable red marking pointer.

Scales

The final scale values are determined according to the following norm line: 1-1,2-1,5-2-2,5-3-4-5-6-7,5-8 and multiples of 10.

In case of instruments for current transformer connection this norm line is additionally supplemented with the standard values 1,25-1,6-1,8 and multiples of 10.

Special adjustment according to norm line in any measuring size, as for example „%”, „m/s”, „Upm”, „bar” etc.

Special adjustment beyond the norm line, measuring size in any order.


Interchangeable scales

The product line has interchangeable scales. Such scales allows an easy ex-change and fix. If you need to change the dial of the instrument, open the lid and replace the dial the close the lid. This procedure must be carried out with the instrument disconnected.


Instructions

DIN 43700	Instruments for table installation, nominal and cut-out dimensions and sample size
DIN 43701	Electrical control panel measuring instruments
DIN 43718	Front frame and front plates
DIN 43780	Performance specifications for direct acting indicating instruments and their accessories
DIN 43802	Scales and pointers for electrical measuring instruments
DIN 16257	Nominal positons and position signs for measuring instruments
DIN 57410/VDE 0410	Safety requirements for indicating and writing measuring instruments and their accessories
VDE 0411	Protective measures for electronic measuring instruments
VDE 0110	Determinations for the measurements of the air and leakage path of electrical resources
DIN 40050	Degrees of protection; foreign material and waterproofing for electrical resources
VDE/VDI 3540 sheet 2	Reliability of measuring - control- and regulation instruments climatic classes for instruments and accessories).
DIN 43807	Connections and clamps
DIN 46200/46282	Connecting bolts
UL 94 V-0	According to the UL Burning property class
2006/95/EG	Rule of low tension
2004/108/EG	Rule of EMV

CE certified

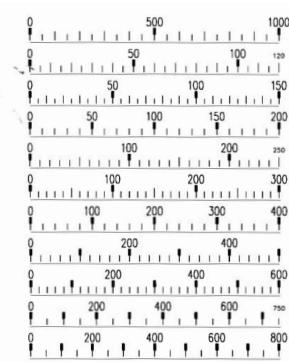


Longitud de escala de 30 a 99 mm / Scale length from 30 to 99 mm

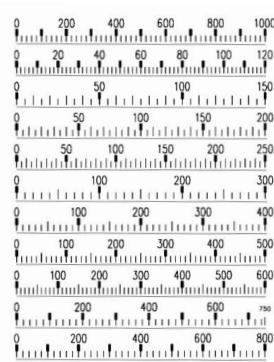

Longitud de escala de 100 a 199 mm / Scale length from 100 to 199 mm

ANALOGUE MEASURING INSTRUMENTS

EQ - Moving iron instruments



- For AC current frequency range 15 - 400 Hz
- For AC voltages frequency range 15 - 100 Hz
- Class 1.5



Description

The moving-iron panel meters are mainly used for the measurement of AC currents for frequency range of 15...400Hz and voltages in the frequency range of 15...100Hz. They indicate the rms value of the wave, even with high harmonics, with a minor influence on the accuracy. Our instruments are normally calibrated for sinusoidal AC.

For current above 100A or high voltages, the instruments must be connected through measuring transformers.

Moving iron instruments can be connected in any order without observation of polarity (ki) on the current transformer.

Electrical Data

Overload capacity according to DIN 43780

Continuously	1,2 times rated value
Short duration	10 x IN 5 s in ammeters
	2 x UN 5 s in voltmeters

The setting time is approximately 1 minute.

Consumption

Ammeters up to 15 A	0,5 VA
Ammeters more than 15 A	0,8 VA
Voltmeter between	1 - 4,5 VA

Moving iron instruments

Moving-iron movement with silicone oil damping. Pivot suspension with spring loaded jewel bearings for vibration and shock resistance.

Scales

90° scale, compressed at the beginning. Coarse-fine division. For ammeters with overload scaling, it covers between 10% (for 1,2In) y el 35% (for 5In) of the total scale length.

Mounting in DIN rail (EQ35n)

For measuring current and voltage in panel boards with 35 mm DIN rail according DIN 50 022.

Dimensions: 85 x 45 x 65 mm / Weight: 0.1 Kg

The instruments of this line are adapted by their dimensions to common installations devices. The installation width of the instruments of 45 mm corresponds approx. for 3 units. They can easily mounted on DIN rail bars by snap on mounting.

The terminals are protected against accidental contact.

The moving iron meter is jewelled with silicon oil damping.

Consumption

Amperímetro	max. 0,5 VA
Voltímetro	max. 2,5 VA

Consumption of EQ35p

Ammeter between	max. 0,5 VA
Ammeter 5 A	max. 0,5 VA
Voltmeter between	max. 2,5 VA
Voltmeter 100 V	max. 2,5 VA
Voltmeter 110 V	max. 2,5 VA

Table for norm scales of voltmeters for connection to voltage transformer

* Voltmeter for connection to voltage transformer:	sec. 100 V or 110 V	
	Prim. Rated Voltage	Scale
	500 V	0... 600 V
	600 V	0... 720 V
	1 KV	0... 1,2 KV
The final scale value is 1.2 times the rated voltage, for example:	3 KV	0... 3,6 KV
	5 KV	0... 6 KV
	6 KV	0... 7,2 KV
	10 KV	0... 12 KV
for connection to transformer sec. 100 V	10 KV	0... 18 KV
the measuring range is 0...120 V	15 KV	0... 18 KV
	20 KV	0... 24 KV
for connection to transformer sec. 110 V	25 KV	0... 30 KV
the measuring range is 0...132 V	30 KV	0... 36 KV
	33 KV	0... 40 KV
	60 KV	0... 72 KV
Please indicate primary voltage, scale and secondary voltage when ordering..	100 K	0... 120 KV

ANALOGUE MEASURING INSTRUMENTS


Standard measuring ranges

AC Voltages		AC Current
6 V	(except EQ35n)	100 mA
10 V	(except EQ35n)	150 mA
15 V	(except EQ35n)	250 mA
25 V	(except EQ35n)	400 mA
40 V	(except EQ35n)	600 mA
60 V	(except EQ35n)	1 A
100 V		1.5 A
120 V		2.5 A
132 V	(except EQ35n)	4 A
150 V		5 A
250 V		6 A
300 V		10 A
400 V	(except EQ35n)	15 A
500 V		20 A (except EQ35n)
600 V	(except EQ35n)	25 A (except EQ35n)
750 V	(except EQ48n/EQ35n)	30 A (except EQ35n)
		40 A (except EQ35n)
		50 A (except EQ35n)
		60 A (except EQ35n)
		100 A (except EQ48n/EQ35n)
For connection to voltage transformer		For connection to current transformer
.../100 V secondary		.../1 A secondary
.../110 V secondary		.../5 A secondary


Other measuring ranges on request.

Connection diagrams


Voltmeter:

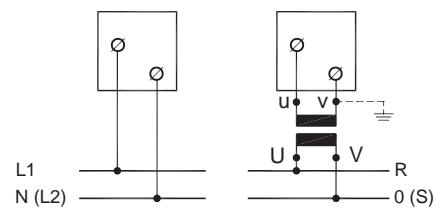

Ammeter:

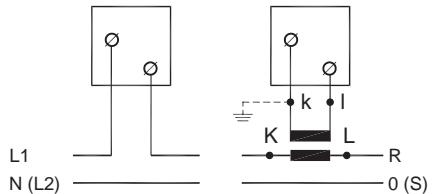

Dimensions EQ35n:

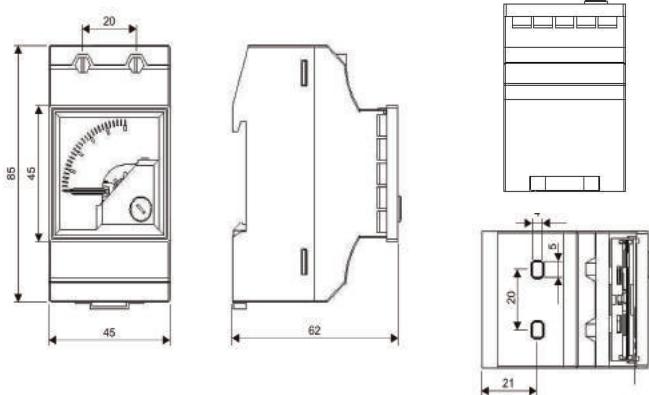


Dimensions in mm / Weight in gramme

Type	a	c	d	e	g	h	Ø	Weight	
EQ 48n	> 30 A	48	64	72	45 ^{+0,6}	28	5	M6	155
	others	48	54	62,5	45 ^{+0,6}	28	5	M4	145
EQ 72n	> 60 A	72	68	76	67 ^{+0,5}	8*	5	M8	230
	30 < I < 60 A	72	64	76	67 ^{+0,5}	8*	5	M6	210
	others	72	60	76	67 ^{+0,5}	8*	5	M4	190
EQ 96n	> 60 A	96	68	76	92 ^{+0,8}	8*	5	M6	300
	25 < I < 60 A	96	64	76	92 ^{+0,8}	8*	5	M8	280
	others	96	60	76	92 ^{+0,8}	8*	5	M4	250
EQ 144n	> 60 A	144	67	75	138 ⁺¹	41	8	M6	450
	30 < I < 60 A	144	62	69,5	138 ⁺¹	41	8	M8	430
	others	144	54	62	138 ⁺¹	41	8	M4	400

*26 mm with screw clamps

Fixing clamps included without extra charge

Dimensions:

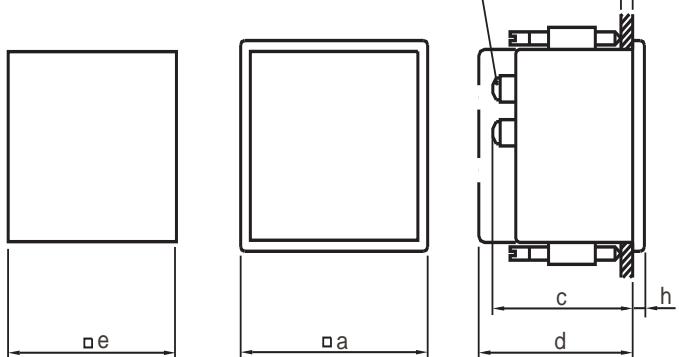

ANALOGUE MEASURING INSTRUMENTS

PR / PAR - Moving coil instruments with rectifier



- For direct measurement of the alternating current and voltage
- or
- For connection at the current and voltage transformer
- Class 1.5

PR with 90° scale

PAR with 240° round scale

Description

The moving-coil rectifier panel meter are suitable for measuring sinusoidal AC currents and voltages. The frequency range for voltmeters an milliammeters up to 600 mA is 25 to 10.000 Hz.

For current higher than 1A - 5A, the frequency can not exceed 50 or 60 Hz.
(On request: 400 Hz).

It is possible to measure higher currents and voltages connecting the instruments through suitable measuring transformers.

Internal resistance, consumption approx.				
Measuring range	PAR 48n	PAR 72n	PAR 96n	PAR 144n
6 - 60 V			1 mA	
100 - 600 V			1.12 mA	
200 - 600 µA			0.01 - 1.64 m VA	
1 - 250 mA			1.6 mVA - 0.76 VA	
400 mA - 5 A			0.38 VA	

Electrical data

Overload capacity according to DIN 43780

Continuously 1,2 times rated value

Short duration 10 x IN 5 s ammeters
2 x UN 5 s voltmeters

The setting time is approximately 1 minute.

Consumption

Voltmeter: aprox.. 1 mA

Ammeter: up to 800 mA:

1 up to 1.5 V voltage drop

from 800 mA: aprox. 0.25 VA

Moving coil instruments with rectifier

Self-shielding moving-coil rectifier system, with core magnet movement and hairsprings for the creation of the restoring torque. Pivot suspension with spring loaded jewel bearings for vibration and shock resistance.

Scales

90° scale (PR..)/ 240° scale (PAR...n), practically linear. Slightly compressed at the beginning for voltmeters under 40V. The graduations at the beginning of the scale are electrically suppressed in rated value voltmeters. o-fino.

ANALOGUE MEASURING INSTRUMENTS


Standard Measuring Ranges		
AC Voltage	AC Current PR..n	PAR..n
6 V	1 mA	1 mA
10 V	1,5 mA	1,5 mA
15 V	2,5 mA	2,5 mA
25 V	4 mA	4 mA
25 V	6 mA	6 mA
40 V	10 mA	10 mA
60 V	15 mA	15 mA
132 V	25 mA	25 mA
150 V	40 mA	40 mA
250 V	60 mA	60 mA
300 V	100 mA	100 mA
400 V	150 mA	150 mA
500 V	250 mA	250 mA
600 V	400 mA	400 mA
	600 mA	600 mA
	1 A*	1 A*
	1,5 A*	1,5 A*
	2,5 A*	2,5 A*
	4 A*	4 A*
	6 A*	6 A*
	10 A*	10 A*
For connection to voltage transformer .../100 V secondary	For connection to current transformer .../1 A secondary	
.../110 V secondary	.../5 A secondary	

*At PR48n/PAR48n with external transformers


Other measuring ranges on request.

Connection diagrams

Voltmeter:

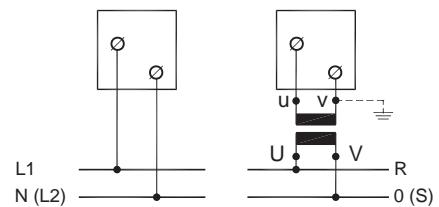


Ammeter:

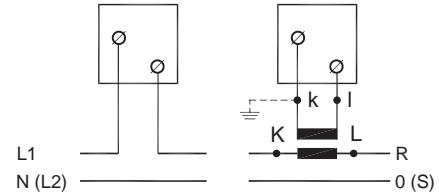

Dimensions in mm / Weight in gramme

Typ	a	c	d	e	g	h	Weight
PR 48n	48	55	62	45 ^{+0,6}	28	5	280
PR 72n	72	55	74	68 ^{+0,7}	8 ¹	5	290
PR 96n	96	55	74	92 ^{+0,8}	8 ¹	5	375
PR 144n	144	53	74	138 ⁺¹	40	5	690
PAR 48n	48	53	64	45 ^{+0,6}	26	5	235
PAR 72n	72	53	64	68 ^{+0,7}	40	5	560
PAR 96n	96	53	64	92 ^{+0,8}	40	5	515
PAR 144n	144	53	64	138 ⁺¹	40	5	740

*26 mm with screw clamps

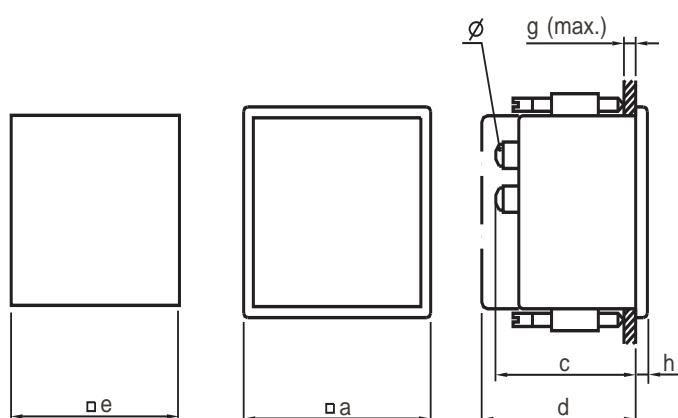

ANALOGUE MEASURING INSTRUMENTS

EQ..n SWT-3 / EQ..n SWT-6 Moving iron voltmeter with selector switch



- Clase 1.5

Description

Three-phase voltmeters are used for measuring the voltages between phases, or phase-phase and phase-neutral in a line. They incorporate a switch in order to select the wires between which the measurement is desired. The EQ..n SWT-3 also has a position of disconnection in the switch (OFF). Their frequency range is 25 to 100 Hz. They indicate the rms value of the voltage, even with high harmonics, with a minor influence on the accuracy.

Electrical data

Overload capacity according to DIN 43780

Continuously 1,2 times rated value

Short duration 2 x UN 5 s voltmeters

The setting time is approximately 1 minute.

Consumption

3,5 VA max.

Moving iron voltmeter


Moving-iron movement with silicone oil damping in the voltmeters. They use hairsprings for the creation of the restoring torque, and pivot suspension with spring-loaded jewel bearings for vibration and shock resistance.

Scales


90° scale with coarse-fine division. Scales are practically linear for ammeters, and compressed at the beginning for the voltmeters.

Connection diagrams

EQ...SWT-3

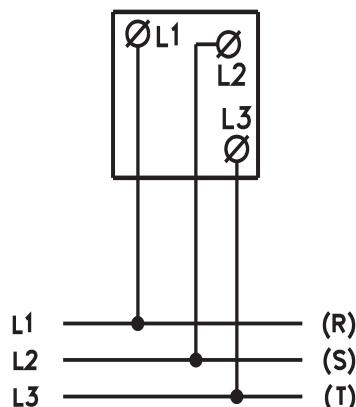

EQ...SWT-6

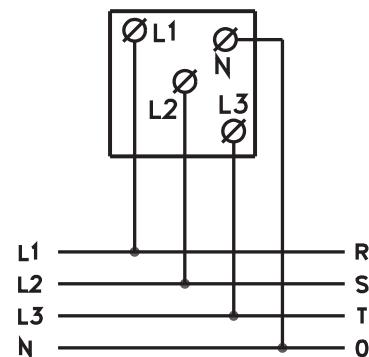

ANALOGUE MEASURING INSTRUMENTS


Technical Features

Type		EQ72n SWT-6	EQ96n SWT-6	EQ72n SWT-3	EQ96n SWT-3
Front frame (mm)		72 x 72	96 x 96	72 x 72	96 x 96
Scale length (mm)		91	97	91	97
Panel cut-out (mm)		66 ^{+0,7}	92 ^{+0,8}	66 ^{+0,7}	92 ^{+0,8}
Installation depth (mm)		55	55	55	55
Switch settings	Measuring range				
6 positions without zero position L3-L1, L2-L3, L1-L2, L1-N, L2-N, L3-N	V=	150 250 300 400 500 600	● ● ● ● ● ●	● ● ● ● ● ●	- - - - - -
	For connection to voltage transformer	.../100* .../110*	● ●	● ●	- -
Switch settings	Measuring range				
3 position with zero position L1-L3, L2-L3, L1-L2, OFF	V=	150 250 300 400 500 600	- - - - - -	- - - - - -	● ● ● ● ● ●
	For connection to voltage transformer	.../100* .../110*	- -	- -	● ●
Terminal cover according to VGB 4 included		●	●	●	●

* Please indicate primary voltage and final scale value when ordering

Dimensions in mm / Weight in gramme

Type	a	b	c	d	e	f	g	h	Ø	Weight
EQ72n SWT-3/-6	72	-	53	68	68 ^{+0,7}	-	40	5	M4	190
EQ96n SWT-3/-6	96	-	53	68	92 ^{+0,8}		40	5	M4	230

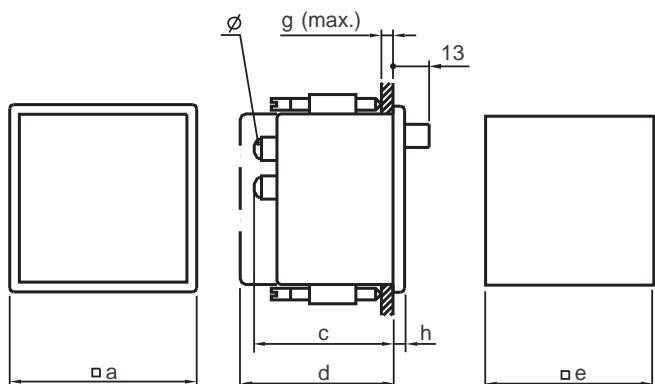

ANALOGUE MEASURING INSTRUMENTS

EQ..n SWT - Moving iron voltmeters with integrated ammeter switch



- Class 1.5

Description

They are an ammeter for measuring the current in each phase of a 50-60 Hz three-phase line. Three-phase voltmeters are used for measuring the voltages between phases, or phase-phase and phase-neutral in a line. They incorporate a switch in order to select the wires between which the measurement is desired. The EQ..n SWT also has a position of disconnection in the switch (OFF). They indicate the rms value of the voltage, even with high harmonics, with a minor influence on the accuracy.

Please indicate on order if instruments are connected directly (max. 10 A), or to a current transformer. In this case, please indicate ratio of current transformer).

Electrical data

Overload capacity according to DIN 43780

Continuously 1,2 times rated value

Short duration 2 x UN 5 s voltmeters

The setting time is approximately 1 minute.

Consumption

1VA per phase

Moving iron


Moving coil with rectifier system in the ammeter, self-shielding movement, with core magnet. They use hairsprings for the creation of the restoring torque, and pivot suspension with spring-loaded jewel bearings for vibration and shock resistance

Scales

90° scale with coarse-fine division. Scales are practically linear.

Connection diagram

switchable ammeter

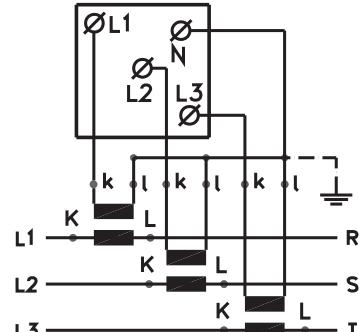


Technical Features

Type	EQ72n SWT	EQ96n SWT
Front frame (mm)	72 x 72	96 x 96
Scale length (mm)	91	97
Weight (g)	190	230
Panel cut-out (mm)	66 ^{+0,7}	92 ^{+0,8}
Installation depth (mm)	55	55
Switch settings	Measuring range	
4 positions L1, L2, L3, OFF	mA= 400 600 A= 1 1,5 2,5 4 6 For connection at .../5 the current .../1	○ ○ ○ ○ ○ ○ ● ● ● ●
Terminal cover according to VGB 4 included		● ●

● available ○ on request


Dimensions in mm / Weight in grammes

Modelo	a	b	c	d	e	f	g	h	Ø	weight
EQ72n SWT	72	-	53	68	68 ^{+0,7}	-	40	5	M4	190
EQ96n SWT	96	-	53	68	92 ^{+0,8}		40	5	M4	230

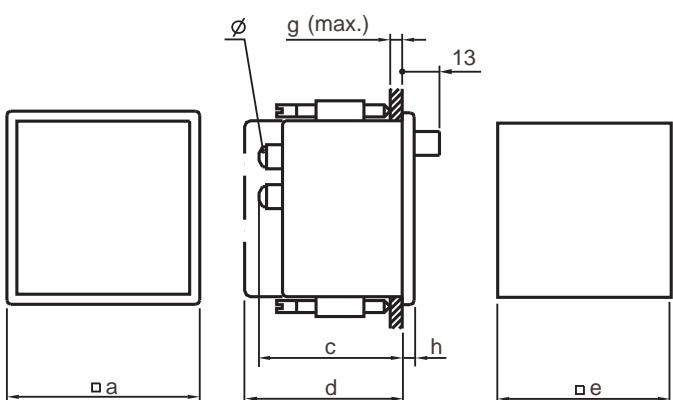

ANALOGUE MEASURING INSTRUMENTS

BIQ...n - Maximum demand indicators



- Class 3
- For connection to current transformers
- Secondary 5 A or 1 A
- With interchangeable scale

Description

The movement consists of a bimetallic spiral which is expanded by the heat caused by the current circulating in it, driving the pointer. A second spiral, mounted in opposition, compensates the effect of the ambient temperature. The ambient temperature which can oscillate from -10 °C up to +55 °C.

Due to its long response time, short interval current peaks are not registered and the instrument indicates by a black pointer the mean of the r.m.s. current in a specified period of time (15 minutes). The maximum indication is registered by the position of the red pointer, dragged by the black one. By means of a sealable knob it is possible to reset the red pointer to the position of the black one in order to make a new reading. The maximum demand meters are used to monitor lines in feeders, transformers and electrical installations in general.

Overload capacity according to DIN 43780

Continuously	1,2 times nominal value
Short duration	10 times nominal value


Saturating current transformers shall be used to protect the instruments against overloads exceeding this rating.

Scales

The full-scale value is 1.2 times I_n , (I_n is the rated primary current of the current transformer). 90° scale, quadratic. Coarse-fine division.

Dimensions in mm / Weight in grammes

Type	a	c	d	e	g	h	Ø	Weight
BIQ72n	72	55	74	68 ^{+0,7}	8 ¹	4,6	M6	190
	72	55	74	68 ^{+0,7}	8 ¹	4,6	M4	190
BIQ96n	96	55	74	92 ^{+0,8}	8 ¹	5	M6	250
	96	55	74	92 ^{+0,8}	8 ¹	5	M8	250

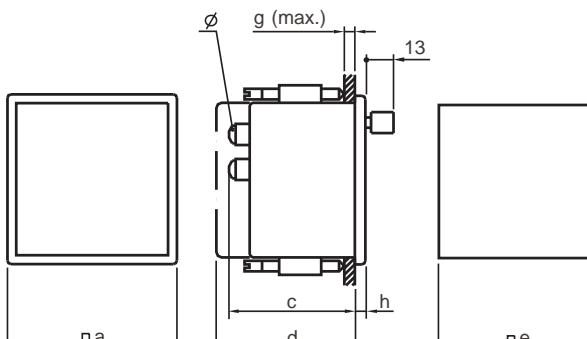


Technical Features

Type	BIQ72	BIQ96n	
Front frame (mm)	72 x 72	96 x 96	
Scale length (mm)	91	97	
Consumption .../5A	2,5 VA	2,5 VA	
.../1A	1,6 VA	1,6 VA	
Setting time at transformer 15 min	.../5A .../1A	● ●	
Transformer primary current (A) = 100%	Final scale value (A) = 120% Primary rated current + 20% overload		
A	5 10 15 20 25 30 35 40 50 60 75 100 125 150 200 250 300 400 500 600 750 800 1,0 kA 1,2 kA 1,5 kA 2,0 kA 2,5 kA 3,0 kA 4,0 kA	6 12 18 24 30 36 48 60 72 90 120 150 180 240 300 360 480 600 720 900 960 1,2 kA 1,4 kA 1,8 kA 2,4 kA 3,0 kA 3,6 kA 4,8 kA	6 12 18 24 30 36 48 60 72 90 120 150 180 240 300 360 480 600 720 900 960 1,2 kA 1,4 kA 1,8 kA 2,4 kA 3,0 kA 3,6 kA 4,8 kA
Terminal cover	● ●		

Backside terminal cover for protection according to VGB 4
(Please indicate when ordering)

Connection diagrams BIQ

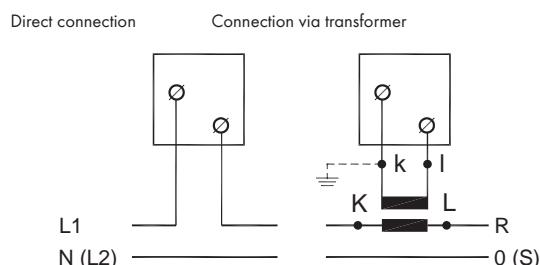

ANALOGUE MEASURING INSTRUMENTS

BOQ...n - Combined maximum demand indicators



- Clase 3 (Maximum demand indicator) y 1.5 (Moving iron ammeter)
- For connection to current transformers
- Secondary 5 A or 1 A
- With interchangeable scale

Description

The maximum demand indicator consists of a bimetallic spiral which is expanded by the heat caused by the current circulating in it, driving the pointer. A second spiral, mounted in the opposition, compensates the effect of the ambient temperature. The ammeter uses a moving-iron movement with silicone oil damping and pivot suspension with spring loaded jewel bearings for vibration and shock resistance. They combine a maximum demand meter and a moving iron ammeter in one instrument. Due to its long response time, short interval current peaks are not registered and the instrument indicates by a black pointer the mean of the r.m.s. current in a specified period of time (15 minutes). The maximum indication is registered by the position of the red pointer, dragged by the black one. By means of a sealable knob it is possible to reset the red pointer to the position of the black one in order to make a new reading. Moreover, they use the moving iron ammeter for measuring the rms value of the current at any racy.

Overload capacity according to DIN 43780

Continuously 1,2 times nominal value

Short duration 10 times nominal value

Saturating current transformers shall be used to protect the instruments against overloads exceeding this rating.


Scales

The full -scale value is 1.2 times I_n (I_n is the rated primary current of the current transformer). 90° scale, quadratic. Coarse-fine division.

Dimensions in mm / Weight in grammes

Modelo	a	c	d	e	g	h	Ø	Weight
BOQ72n .../5 A	72	55	74	68 ^{+0,7}	8 ¹	4,6	M8	230
.../1 A	72	55	74	68 ^{+0,7}	8 ¹	4,6	M4	220
BOQ96n .../5 A	96	55	74	92 ^{+0,8}	8 ¹	5	M6	290
.../1 A	96	55	74	92 ^{+0,8}	8 ¹	5	M8	280

On request: Other dimensions

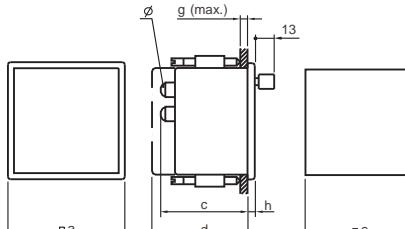


Technical Features

Type	BOQ72	BOQ96n	
Front frame (mm)	72 x 72	96 x 96	
Scale length (mm)	Bimetallic Moving iron	52 61 71 90	
Consumption .../5A .../1A	3,4 VA 2,5 VA	3,4 VA 2,5 VA	
Setting time at transformer 15 min/5A .../1A	● ●	
		● ●	
		Final scale value (A)	
Transformer primary current (A) = 100%	Bimetallic system 20% overload = 120%	Moving iron system 20% overload = 120%	
A	5 10 15 20 25 30 40 50 60 75 100 125 150 200 250 300 300 400 500 600 750 800 1,0 kA 1,2 kA 1,5 kA 2,0 kA 2,5 kA 3,0 kA 4,0 kA	6 12 18 24 30 36 48 60 72 90 120 150 180 240 300 360 480 600 720 900 960 1,2 kA 1,4 kA 1,8 kA 2,4 kA 3,0 kA 3,6 kA 4,8 kA	6 12 18 24 30 36 48 60 72 90 120 150 180 240 300 360 480 600 720 900 960 1,2 kA 1,4 kA 1,8 kA 2,4 kA 3,0 kA 3,6 kA 4,8 kA
Terminal cover		● ●	


Backside terminal cover for protection according to VGB 4 (Please indicate when ordering)

Connection diagrams BOQ

Direct connection




Connection via transformer



ANALOGUE MEASURING INSTRUMENTS

DQ...n - Wattmeter Active Power



- For alternating current 50-60 Hz
- Class 1.5
- Scale 90°

Description

DQ wattmeters are used for active power measurement. There are versions for single-phase AC and three-phase with 3 or 4 wires for balanced and unbalanced loads. The frequency range is 50 - 60 Hz.

Ferrodynamic system, with one measuring element for DQ/1w, DQ/1d and DQ/1; two elements for DQ/2 (aron system), and 2 1/2 elements for DQ/3. Eddy-current damping, with pivot suspension and spring-loaded jewel bearings for vibration and shock resistance.

Consumption

The consumption per current path is < 0,2 VA

The current consumption in the voltage path is < 3,9 VA

Scales

90° scale, practically linear. Coarse-fine division- The full-scale value must be between 0.2 and 2 times rated apparent power, which is calculated as follows:

- For single-phase AC:

$$S(W) = \text{Primary voltage (V)} \times \text{Primary current (A)}$$

- For three-phase AC:

$$S(W) = \sqrt{3} \times \text{Primary line-to-line voltage (V)} \times \text{Primary current (A)}$$

Unless otherwise indicated, the full-scale value is calculated by rounding S down to one of the following standard value: 1 - 1,2 - 1, 5 - 2 - 2,5 3 - 4 - 5 - 6 - 7,5 - 8 or their decimal multiples.

On request: Zero center. For example, -100-0-100kW

Overload capacity according to DIN 43780

Overload capacity continuously 1,2 I_n.

Dimensions in mm


Type	a	c	e	g	h	Ø
DQ96n/1w, /1d, /1	96	134	92 ^{+0,8}	40	5,5	M4
DQ96n/2, /3	96	134	92 ^{+0,8}	40	5,5	M4
DQ144n/1w, /1d, /1	144	134	138 ⁺¹	40	5,5	M4
DQ144n/2, /3	144	134	138 ⁺¹	40	5,5	M4

Technical Features

Front frame (mm)	96 x 96	144 x 144
Scale length (mm)	97	146
Weight (g)	a = 650 b = 650 c = 750 d = 900	a = 900 b = 950 c = 1000 d = 1100
Measuring range	U (V)	I (A)
Single-phase AC	DQ96n/1w	DQ144n/1w
a ~ 57,7 - 63,5 100 - 110 - 127 230 - 400	5 1	● ●
Three-phase AC, three wires, balanced load	DQ96n/1d	DQ144n/1d
b ≈ 100 - 110 - 230 400 440 - 500	5 1	● ●
Three-phase AC, three wires, unbalanced load	DQ96n/2	DQ144n/2
c ≈ 100 - 110 - 230 400 440 - 500	5 1	● ●
Three-phase AC, four wires, balanced load	DQ96n/1	DQ144n/1
d ≈ 100 - 110 - 230 400 440 - 500	5 1	● ●
Three-phase AC, four wires, unbalanced load	DQ96n/3	DQ144n/3
e ≈ 100 - 110 - 230 400 440 - 500	5 1	● ●

● available ○ on request

Connection diagrams see page 4/16.

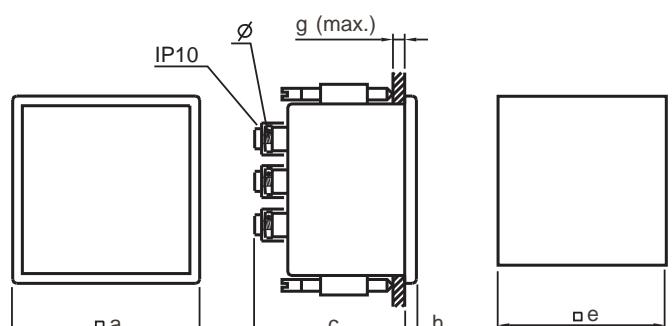

ANALOGUE MEASURING INSTRUMENTS

DQ..n/b - Varmeters Power Reactive



- For alternating current 50-60 Hz
- Class 1.5
- Scale 90°

Description

DQ varmeters are used for reactive power measurement. There are versions for single-phase AC and three-phase with 3 or 4 wires for balanced and unbalanced loads. The frequency range is 50 - 60 Hz.

Ferrodynamic system, with one measuring element for DQ/1wb, DQ/1db and DQ/1b; two elements for DQ/2 (aron system), and 2 1/2 elements for DQ/3b. Eddy-current damping, with pivot suspension and spring-loaded jewel bearings for vibration and shock resistance.

Consumption

The consumption per current path is < 0,2 VA

The current consumption in the voltage path is < 3,9 VA

Scales

90° scale, practically linear. Coarse-fine division- The full-scale value must be between 0.2 and 2 times rated apparent power, which is calculated as follows:

- For single-phase AC:

$$S(W) = \text{Primary voltage (V)} \times \text{Primary current (A)}$$

- For three-phase AC:

$$S(W) = \sqrt{3} \times \text{Primary line-to-line voltage (V)} \times \text{Primary current (A)}$$

Unless otherwise indicated, the full-scale value is calculated by rounding S down to one of the following standard value: 1 - 1,2 - 1, 5 - 2 - 2,5 3 - 4 - 5 - 6 - 7,5 - 8 or their decimal multiples.

On request: Zero center. For example, -100-0-100kW

Overload capacity according to DIN 43780

Overload capacity continuously 1,2 I_n .

Dimensions in mm


Type	a	c	e	g	h	Ø
DQ96n/1wb, /1db, /1b	96	134	92 ^{+0,8}	40	5,5	M4
DQ96n/2b, /3b	96	134	92 ^{+0,8}	40	5,5	M4
DQ144n/1wb, /1db, /1b	144	134	138 ⁺¹	40	5,5	M4
DQ144n/2b, /3b	144	134	138 ⁺¹	40	5,5	M4

Technical Features

Front frame (mm)	96 x 96	144 x 144	
Scale length (mm)	97	146	
Weight (g)	a = 460 b = 510 c = 695 d = 725	a = 720 b = 770 c = 960 d = 990	
Measuring range	U (V)	I (A)	
Single-phase AC	DQ96n/1wb	DQ144n/1wb	
a \sim	57,7 - 63,5 100 - 110 - 127 230 - 400	5 1	● ● ●
Three-phase AC, three wires, balanced load	DQ96n/1db	DQ144n/1db	
b \equiv	100 - 110 - 230 400 440 - 500	5 1	● ● ●
Three-phase AC, three wires, unbalanced load	DQ96n/2b	DQ144n/2b	
c \equiv	100 - 110 - 230 400 440 - 500	5 1	● ● ●
Three-phase AC, four wires, balanced load	DQ96n/1b	DQ144n/1b	
d \equiv	100 - 110 - 230 400 440 - 500	5 1	● ● ●
Three-phase AC, four wires, unbalanced load	DQ96n/3b	DQ144n/3b	
e \equiv	100 - 110 - 230 400 440 - 500	5 1	● ● ●

● available ○ on request

Connection diagrams see page 4/16.

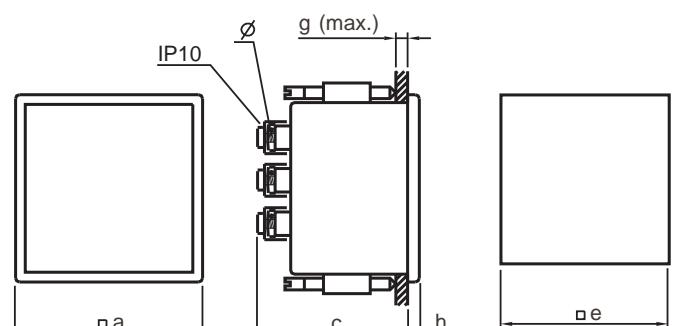

ANALOGUE MEASURING INSTRUMENTS

DAQ...n - Wattmeter Active Power



- For alternating current 50-60 Hz
- Class 1.5
- Scale 240°

Description

DQ wattmeters are used for active power measurement. There are versions for single-phase AC and three-phase with 3 or 4 wires for balanced and unbalanced loads. The frequency range is 50 - 60 Hz.

Ferrodynamic system, with one measuring element for DAQ/1w, DAQ/1d and DAQ/1; two elements for DAQ/2 (aron system), and 2 1/2 elements for DAQ/3. Eddy-current damping, with pivot suspension and spring-loaded jewel bearings for vibration and shock resistance.

Consumption

The consumption per current path is < 0,2 VA

The current consumption in the voltage path is < 3,9 VA

Scales

90° scale, practically linear. Coarse-fine division- The full-scale value must be between 0.2 and 2 times rated apparent power, which is calculated as follows:

- For single-phase AC:

$$S(W) = \text{Primary voltage (V)} \times \text{Primary current (A)}$$

- For three-phase AC:

$$S(W) = \sqrt{3} \times \text{Primary line-to-line voltage (V)} \times \text{Primary current (A)}$$

Unless otherwise indicated, the full-scale value is calculated by rounding S down to one of the following standard value: 1 - 1,2 - 1,5 - 2 - 2,5 3 - 4 - 5 - 6 - 7,5 - 8 or their decimal multiples.

On request: Zero center. For example, -100-0-100kW

Overload capacity according to DIN 43780

Overload capacity continuously 1,2 I_n.

Dimensions en mm


Type	a	c	e	g	h	Ø
DAQ96n/1w, /1d, /1	96	134	92 ^{+0,8}	40	5,5	M4
DAQ96n/2, /3	96	134	92 ^{+0,8}	40	5,5	M4
DAQ144n/1w, /1d, /1	144	134	138 ⁺¹	40	5,5	M4
DAQ144n/2, /3	144	134	138 ⁺¹	40	5,5	M4

Technical Features

Front frame (mm)	96 x 96	144 x 144	
Scale length (mm)	142	230	
Weight (g)	a = 460 b = 510 c = 695 d = 725	a = 900 b = 950 c = 1000 d = 1100	
Measuring range	U (V)	I (A)	
Single-phase AC	DAQ 96n/1w	DAQ 144n/1w	
a ~	57,7 - 63,5 100 - 110 - 127 230 - 400	5 1	● ● ●
Three-phase AC, three wires, balanced load	DAQ 96n/1d	DAQ 144n/1d	
b ≈	100 - 110 - 230 400 440 - 500	5 1	● ● ●
Three-phase AC, three wires, unbalanced load	DAQ 96n/2	DAQ 144n/2	
c ≈	100 - 110 - 230 400 440 - 500	5 1	● ● ●
Three-phase AC, four wires, balanced load	DAQ 96n/1	DAQ 144n/1	
d ≈	100 - 110 - 230 400 440 - 500	5 1	● ● ●
Three-phase AC, four wires, unbalanced load	DAQ 96n/3	DAQ 144n/3	
e ≈	100 - 110 - 230 400 440 - 500	5 1	● ● ●

● available ○ on request

Connection diagrams see page 4/16.

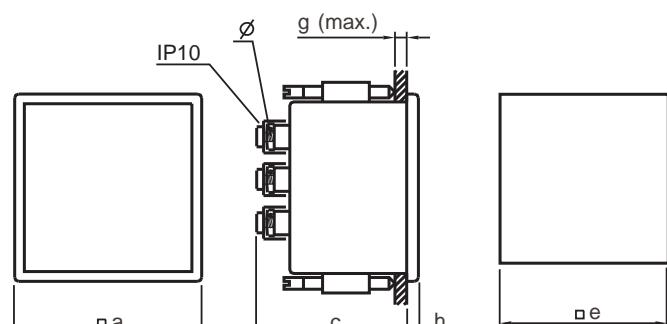

ANALOGUE MEASURING INSTRUMENTS

DAQ..n/b - Varmeters Power Reactive



- For alternating current 50-60 Hz
- Class 1.5
- Scale 240°

Description

DAQ varmeters are used for reactive power measurement. There are versions for single-phase AC and three-phase with 3 or 4 wires for balanced and unbalanced loads. The frequency range is 50 - 60 Hz.

Ferrodynamic system, with one measuring element for DAQ/1wb, DQ/1db and DQ/1b; two elements for DQ/2 (aron system), and 2 1/2 elements for DQ/3b. Eddy-current damping, with pivot suspension and spring-loaded jewel bearings for vibration and shock resistance.

Consumption

The consumption per current path is < 0,2 VA

The current consumption in the voltage path is < 3,9 VA

Scales

90° scale, practically linear. Coarse-fine division- The full-scale value must be between 0.2 and 2 times rated apparent power, which is calculated as follows:

- For single-phase AC:

$$S(W) = \text{Primary voltage (V)} \times \text{Primary current (A)}$$

- For three-phase AC:

$$S(W) = \sqrt{3} \times \text{Primary line-to-line voltage (V)} \times \text{Primary current (A)}$$

Unless otherwise indicated, the full-scale value is calculated by rounding S down to one of the following standard value: 1 - 1,2 - 1, 5 - 2 - 2,5 3 - 4 - 5 - 6 - 7,5 - 8 or their decimal multiples.

On request: Zero center. For example, -100-0-100kW

Overload capacity according to DIN 43780

Overload capacity continuously 1,2 I_n.

Dimensions in mm


Type	a	c	e	g	h	Ø
DAQ96n/1wb, /1db, /1b	96	134	92 ^{+0,8}	40	5,5	M4
DAQ96n/2b, /3b	96	134	92 ^{+0,8}	40	5,5	M4
DAQ144n/1wb, /1db, /1b	144	134	138 ⁺¹	40	5,5	M4
DAQ144n/2b, /3b	144	134	138 ⁺¹	40	5,5	M4

Technical Features

Front frame	(mm)	96 x 96	144 x 144
Scale length	(mm)	142	230
Weight	(g)	a = 460 b = 510 c = 695 d = 725	a = 720 b = 770 c = 960 d = 990
Measuring range	U (V)	I (A)	Type
Single-phase AC			DAQ 96n/1wb
a \sim	57,7 - 63,5 100 - 110 - 127 230 - 400	5 1	● ●
Three-phase AC, three wires, balanced load			DAQ 96n/1db
b \equiv	100 - 110 - 230 400 440 - 500	5 1	● ●
Three-phase AC, three wires, unbalanced load			DAQ 96n/2b
c \equiv	100 - 110 - 230 400 440 - 500	5 1	● ●
Three-phase AC, four wires, balanced load			DAQ 96n/1b
d \equiv	100 - 110 - 230 400 440 - 500	5 1	● ●
Three-phase AC, four wires, unbalanced load			DAQ 96n/3b
e \equiv	100 - 110 - 230 400 440 - 500	5 1	● ●

● available ○ on request



Connection diagrams see page 4/16.

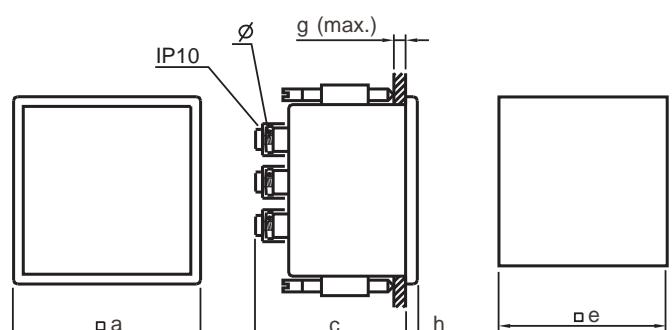



ANALOGUE MEASURING INSTRUMENTS

Connection diagrams:



Active power

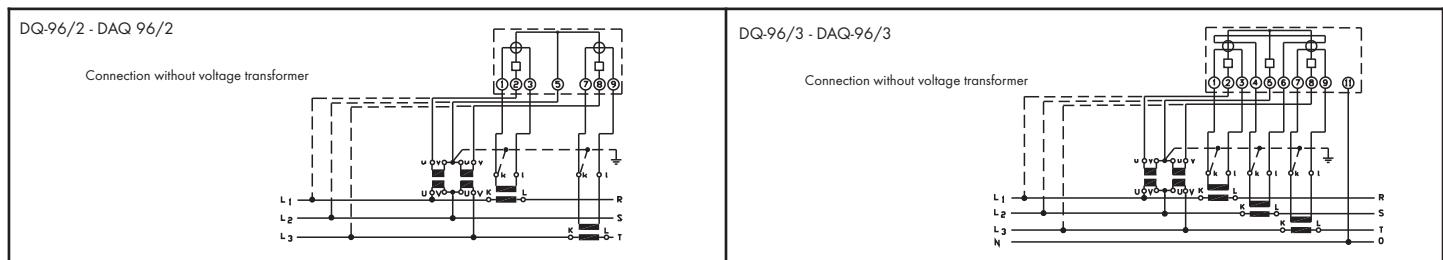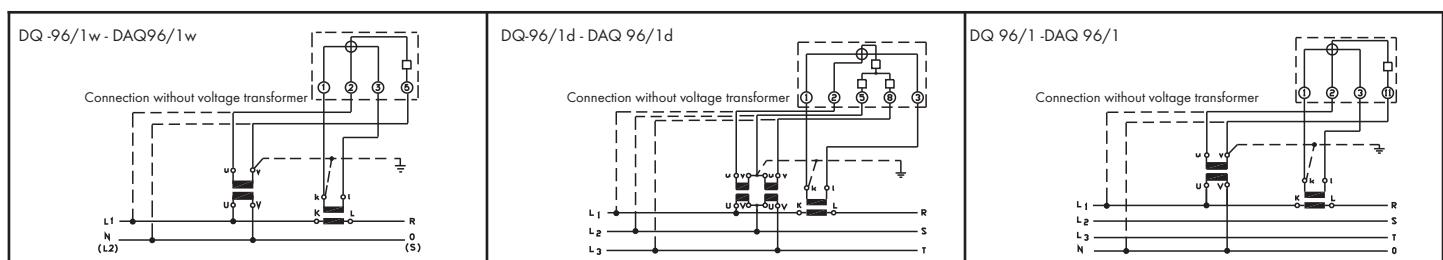

Reactive power

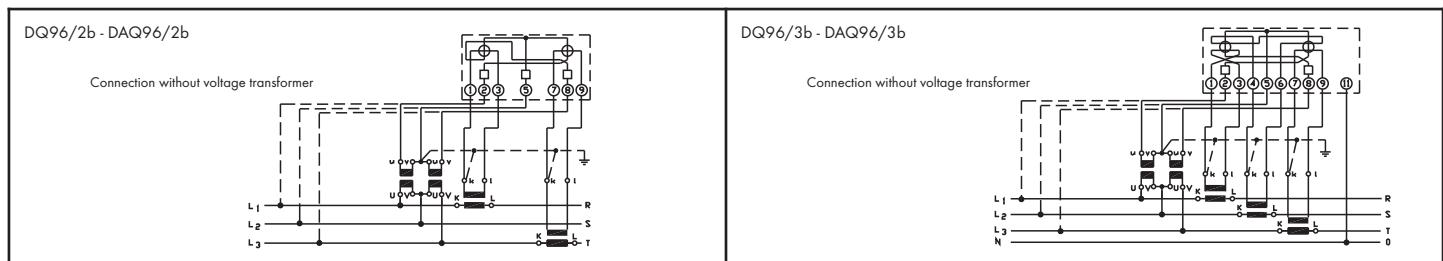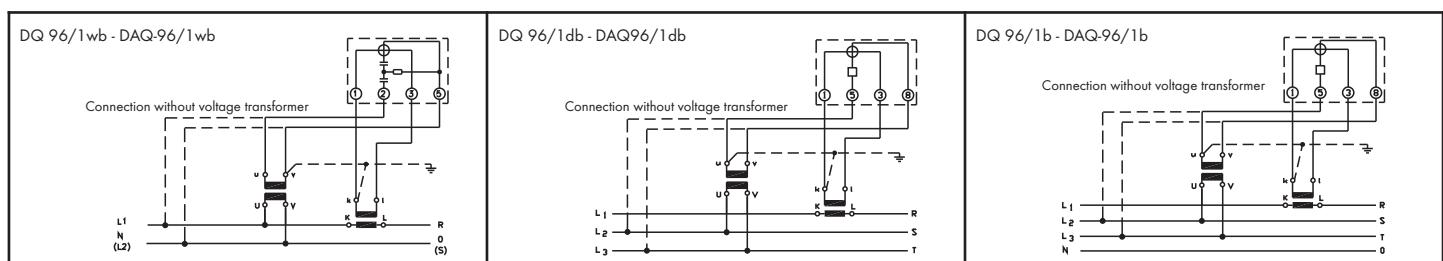

Power factor

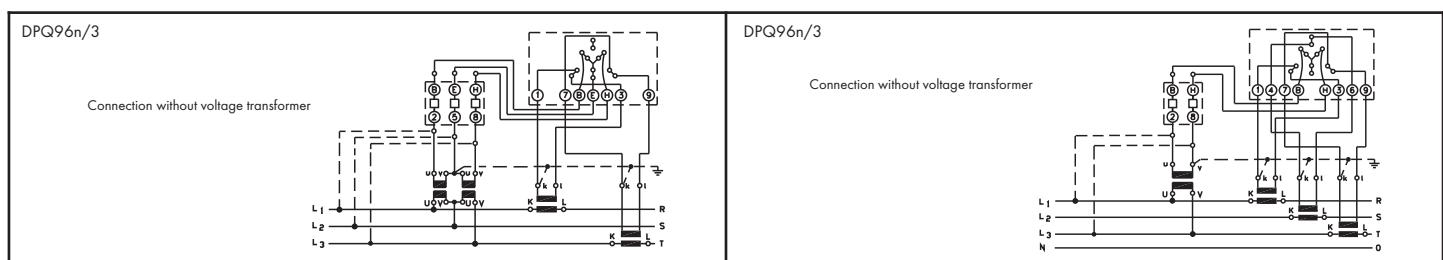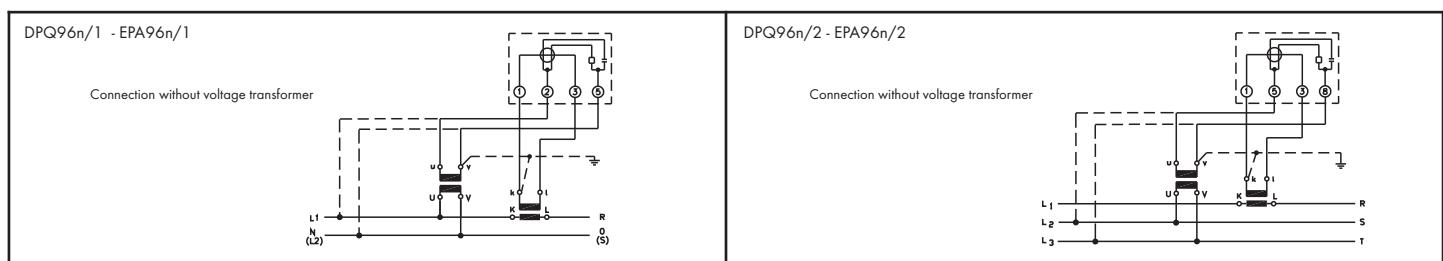

ANALOGUE MEASURING INSTRUMENTS

DPQ - Power factor meter



DPQ/1



DPQ/3

- Class 1.5
- For alternating current 50 or 60 Hz

Description

The DPQ are used for power factor ($\cos \varphi$) measurement. There are versions for single-phase and three-phase AC, for balanced or unbalanced load. Versions .../2 and .../3 are suitable for lines with or without neutral. The frequency is 50 or 60 Hz. The DPQ.../1 y .../2 are used for crossed-coils electrodynamic system. The DPQ.../3, a moving-iron quotientmeter. All of them are equipped with eddy-current damping, pivot suspension and spring-loaded jewel bearings (without spring for DPQ.../3) for vibration and shock resistance. DPQ types have neither mechanical restoring torque non zero adjuster. Therefore, the pointer has not a determinate position when the instrument is disconnected.

Scales

Non-linear 90° (DPQ.../1 and /2) or 360° (DPQ.../3) scales. Coarse-fine division. The DPQ.../3 is able to measure the power factor in the four quadrants (active power exported or imported, with inductive or capacitive power factor).

Standard scale execution:

- cap. 0,5-1-0,5 ind.
- cap. 0,8-1-0,3 ind.
- cap. 0,8-1-0,8 ind.

Technical Features DPQ/1/2

Front frame (mm)	96 x 96	
Scale length (mm)	97	
Consumption	Current 5A Current 1A Voltage	
Voltage U (V)	Current I (A)	Type
Single-phase AC	~	DPQ 96n/1
57,5 - 100 - 110 - 120 220 - 230 - 240 380 - 400 440 - 500	5 1	● ●
Three-phase AC, balanced load	≈	DPQ 96n/2
57,5 - 100 - 110 - 120 220 - 230 - 240 380 - 400 440 - 500	5 1	● ●
Terminal cover		●

Technical Features DPQ/3


Front frame (mm)	96 x 96	
Scale length (mm)	200	
Weight (g)	(with external shunt)	
Consumption	max. 30 mA	
Voltage U (V)	Current (A)	Type
Three-phase AC, unbalanced load	20 ... 120%	DPQ 96s/3
100 - 110 230 ±15 400 440	≈ 5 1	● ●
Terminal cover		○

● available ○ on request

On request: other dimensions

Connection diagrams see page 4/16.

Type	a	c	d	e	g	h	Ø	Weight
DPQ96n/1, /2	96	55	65	$92^{+0,8}$	40	5	M4	600
DPQ 96s/3	96	125	151	$92^{+0,8}$	10	5	M4	1450

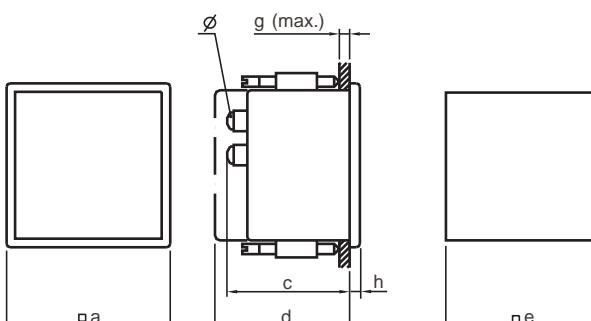

ANALOGUE MEASURING INSTRUMENTS

EPA...n - Power factor meter



- For alternating current 50 or 60 Hz
- Class 1.5
- Scale 240°

Description

The EPA are used for power factor ($\cos \phi$) measurement. There are versions for single-phase and three-phase AC, for balanced. neutral. The frequency is 50 or 60 Hz. They embody a moving-coil movement with electronic transducer. All of them are equipped with eddy-current damping, pivot suspension and spring-loaded jewel bearings for vibration and shock resistance.

Scales

Non-linear 240° scales. Coarse-fine division. The EPA can be furnished with scales covering phase angle spans from 90 up to 260 electric degrees.

Standard scale execution:

- cap. 0,5-1-0,5 ind.
- cap. 0,8-1-0,3 ind.
- cap. 0,8-1-0,8 ind.

Technical Features

Front frame (mm)	96 x 96	
Scale length (mm)	142	
Voltage U (V)	Current I (A)	Type
Single-phase AC	~	EPA 96n/1
57,7 - 100 - 110 - 120 220 - 230 240 380 - 400 440 - 500	5 1	● ●
Three-phase AC, balanced load	≈	EPA 96n/2
57,7 - 100 - 110 - 120 220 - 230 240 380 - 400 440 - 500	5 1	● ●
Terminal cover		○


● available ○ on request

On request: other dimensions

Connection diagrams see page 4/16.


Dimensions in mm / Weight in grammes

Type	a	c	d	e	g	h	Ø	Weight
EPA96n/1, /2	96	106	132	92 ^{+0,8}	40	5	M4	680

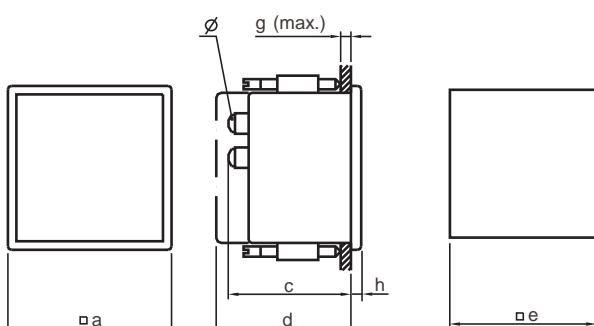

ANALOGUE MEASURING INSTRUMENTS

ISE - Phase sequence indicators



- ISE/1 for three-phase current
- ISE/2 for three-phase current with switch contact

Description

Phase sequence indicators allow to determinate the phase sequence in a 3-phase network. They use an electric circuit, without moving parts. Whe the instrument is connected, if the phase-sequence is correct a gressn light shices. Otherwise, a red light does.

- ISE72n/1 and ISE96n/1: Indicators for panel mounting are suited for permanet connections at voltages between 150 and 600V.
- ISE 96s/2: Indicator for panel mounting. It also incorporates a change-over relay, with potential-free output contacts. When the sequence is not correct or the instrument is disconnected, the relay de-energizes (closed circuit principle). Thus, an alarm can be triggered or any corrective action can be taken.

Technical Features ISE96/2:

Voltage: 110 / 230 / 400 / 440 V
50 or 60 Hz
Switching range: $U_N +20\%$ up to $-20\% U_N$
Relay output: 1 isolated change-over contact (changer)
Switching capacity at
ohmic load: 1×10^6 .
Maximal switching current: 6 A, 250 V max. 300 W at alternating voltage

Technical Features

Type	ISE 72n/1	ISE 96n/1	ISE 96s/2
Front frame (mm)	72 x 72	96 x 96	96 x 96
Consumption (VA)	1,5	1,5	1,5
Voltage (V)			
150 - 600 V	●	●	—
110 V	—	—	○
230 V	—	—	○
400 V	—	—	○
440 V	—	—	○
500 V	—	—	○
Terminal covers	●	●	○

● available ○ on request

Backside terminal cover for protection according to VGB 4


(Please indicate when ordering.)

Dimensions in mm / Weight in gramme

Type	a	c	d	e	g	h	Ø	Weight
ISE72n/1	72	58	76	$68^{+0,7}$	40	4,6	M4	270
ISE96n/1	96	58	76	$92^{+0,8}$	40	5	M4	350
ISE96s/2	96	78	95	$92^{+0,8}$	10	5	M4	575

Connetion diagrams:



ISE 72n/1



ISE 96n/1



ISE96s/2

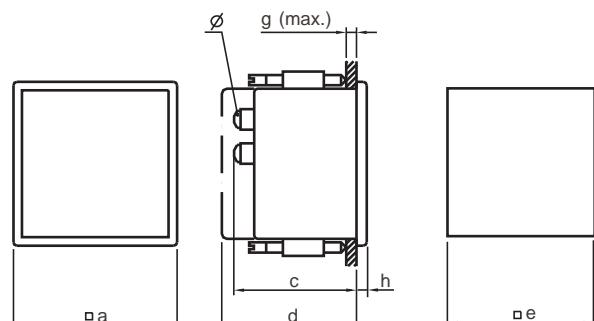

ANALOGUE MEASURING INSTRUMENTS

FA...n / FAG...n - Pointer frequency meter



FA



FAG

- Class 0.5
- FA with 90° scale
- FAG with 240° scale

Description

The pointer frequency meters are used to measure frequencies in power supplies in span of rated frequencies. They have better resolution than reed frequency meters. Moving-coil instrument with electronic transducer. Movement with hairsprings for the creation of the resorting torque. Pivot suspension with spring-loaded jewel bearings for vibration and shock resistance.

Admissible change in rating voltage: $\pm 20\%$

External magnet field: 0.5 mT

Scales

90° (FA..n) or 240° (FAG..n) scales, practically linear. Coarse-finde division.

Technical Features


Type	FA 72n	FA 96n	FA 144n	FAG 72n	FAG 96n
Front frame (mm)	72 x 72	96 x 96	144 x 144	72 x 72	96 x 96
Scale length (mm)	63	97	146	106	142
Consumption	< 7VA	< 7VA	< 7VA	< 7VA	< 7VA
Range (Hz)	U(V)				
45 - 55	100	●	○	●	○
45 - 55	110	●	●	○	○
45 - 55	230	●	●	○	○
45 - 55	400	●	●	○	○
45 - 55	440	●	●	●	○
45 - 55	500	○	○	○	○
45 - 65	100	●	●	○	○
45 - 65	110	●	●	○	○
45 - 65	230	●	●	○	○
45 - 65	400	●	●	○	○
45 - 65	440	●	●	○	○
45 - 65	500	○	○	○	○
55 - 65	100	●	●	○	●
55 - 65	110	●	●	○	○
55 - 65	230	●	●	○	○
55 - 65	400	●	●	○	○
55 - 65	440	●	●	●	○
55 - 65	500	○	○	○	○
Terminal covers		●	●	○	○

● available ○ on request


Backside terminal cover for protection according to VGB 4
(Please indicate when ordering.)

On request: dimensions 48 x 48 mm and 144 x 144 mm.

Dimensions in mm / Weight in gramm								
Type	a	c	d	e	g	h	Ø	Weight
FA72n	72	55	75	68 ^{+0,7}	8 ¹	4,6	M4	210
FA96n	96	55	75	92 ^{+0,8}	8 ¹	5	M4	280
FA144n	144	53	53	138 ⁺¹	40	5,5	M4	490
FAG72n	72	53	53	68 ^{+0,7}	40	5	M4	210
FAG96n	96	53	53	92 ^{+0,8}	40	5,5	M4	280
FAG144n	144	53	53	138 ⁺¹	40	5,5	M4	490

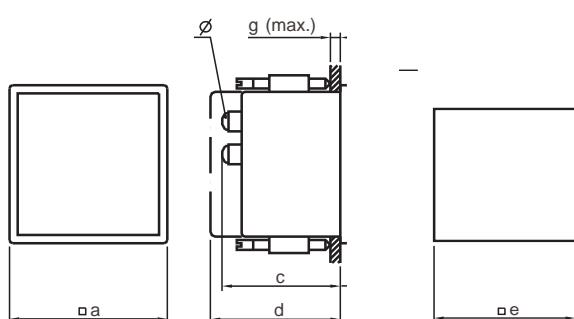


Connection diagrams




ANALOGUE MEASURING INSTRUMENTS

SQ - Synchroscopes



SQ...s



SQ96n

- For alternating current 50-60 Hz
- Analogue execution
- Digital LED execution

Description SQ... analogue

This instrument uses a moving-iron rationmeter, with eddy-current damping. Only when the pointer stops on the scale mark, the frequencies and phase angles of the voltages of both generators are the same. If it stops on another point, there is phase displacement between both voltages or at least one generator is disconnected. When the frequency difference is less than approximately 1.5Hz, the pointer rotates in the direction marked as "+" (if the frequency of the generator G2 is higher than the frequency of G1) or in the direction marked as "-" (if the frequency of G2 is lower).

Description SQ... digital

This instrument shows as well the phasing and the frequency of two current circuits to each other. Only if phasing and frequency are the same the green LEDs are flashing in the middle on the top. When there are different phasings or frequencies the red LEDs are flashing, depending on degree of deviation per size of difference more on the left or more on the right.

Technical Features


Marco (mm)	96 x 96	96 x 96	144 x 144
Measuring range U (V)	Digital type	Analogue type	Analogue type
Single-phase AC	SQ 96n/1	SQ 96s/1	SQ 144s/1
Consumption	max.6 VA	5 VA	max.25 mA
100 / $\tilde{A}3^*$	<input type="circle"/>	<input type="circle"/>	<input type="circle"/>
100 / $\tilde{A}3^*$	<input type="circle"/>	<input type="circle"/>	<input type="circle"/>
100 - 110*	<input checked="" type="circle"/>	<input checked="" type="circle"/>	<input type="circle"/>
230*	<input checked="" type="circle"/>	<input checked="" type="circle"/>	<input type="circle"/>
Three-phase, 3 wire balanced load	SQ 96n/2	SQ 96s/2	SQ 144s/2
Consumption	max.6 VA	5 VA	max.25 mA
100	<input checked="" type="circle"/>	<input checked="" type="circle"/>	<input type="circle"/>
110	<input checked="" type="circle"/>	<input checked="" type="circle"/>	<input type="circle"/>
230*	<input checked="" type="circle"/>	<input checked="" type="circle"/>	<input type="circle"/>
400*	<input checked="" type="circle"/>	<input checked="" type="circle"/>	<input type="circle"/>
440*	<input checked="" type="circle"/>	<input checked="" type="circle"/>	<input type="circle"/>
Terminal covers	-	<input checked="" type="circle"/>	-

● available ○ on request


*with separated series resistor (external) / only analogue type

Dimensions in mm / Weight in grammes



Type	a	c	d	e	g	h	\emptyset	Weight
SQ96n/1 -/2	96	107	119	92 $\pm 0,8$	40	5	M4	680
SQ96s/1 -/2	96	136	76	92 $\pm 0,8$	10	5	M4	1100
SQ144s/1 -/2	144	136	95	144 ± 1	1	5,5	M4	1800

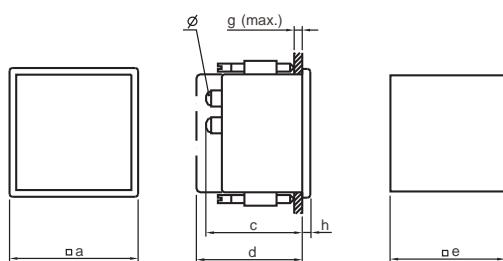

Connection diagrams: SQ96n LED execution

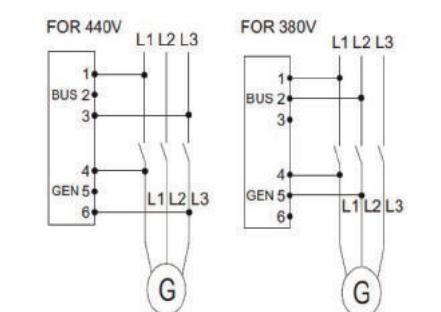


Connection diagrams: SQ96s/SQ144s analogue execution

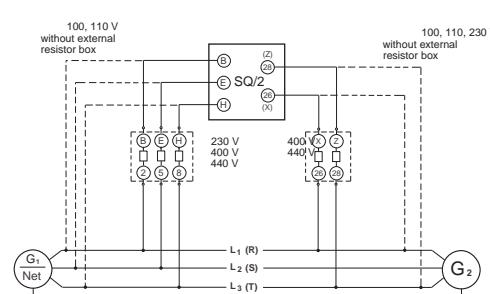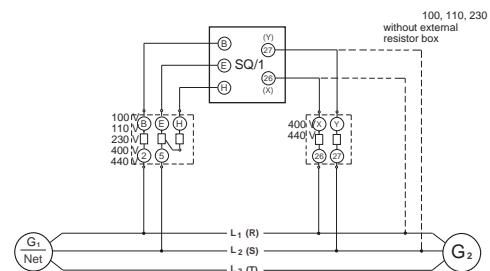

ANALOGUE MEASURING INSTRUMENTS

EQD - Double voltmeter



Description

They use two independent moving-iron movements with silicone oil damping and pivot suspension by means of spring-loaded jewel bearings for vibration and shock resistance.

Scales

Two scales of 90° compressed at the beginning. Coarse-fine division.

- Class 1.5
- 2 scales of 90°

Technical Features

Type	EQD 96n	
Front frame (mm)	96 x 96	
Scale length (mm)	2 x 54	
Weight (g)	305	
Consumption	2 x max.4.5	
Voltage (V)		
2 x 100 ¹⁾	<input checked="" type="radio"/>	
2 x 110 ¹⁾	<input checked="" type="radio"/>	
2 x 150	<input checked="" type="radio"/>	
2 x 230	<input checked="" type="radio"/>	
2 x 250	<input checked="" type="radio"/>	
2 x 300	<input checked="" type="radio"/>	
2 x 500	<input checked="" type="radio"/>	
Tapas cubrebornas	<input type="radio"/>	

● available ○ on request



¹⁾ When connecting to the voltage transformer the indication of the transformer ratio is required.

Dimensions in mm / Weight in gramme

Type	a	c	d	e	g	h	Ø	Weight
EQD96n	96	53	64	92 ^{+0,8}	26	5,5	M4	405


On request: Dimensions 144 x 144 mm

Connection diagrams

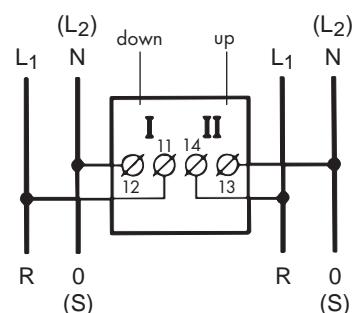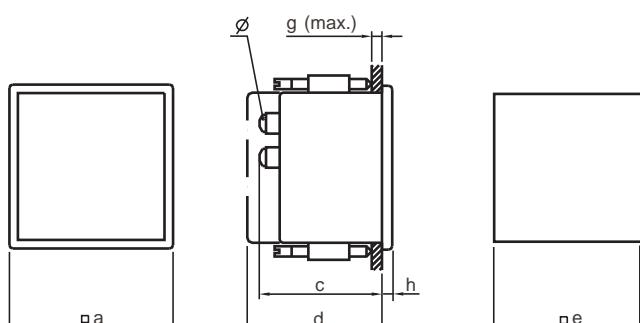

ANALOGUE MEASURING INSTRUMENTS

FAD - Double Pointer frequency meter



FAD

- Moving coil system with electronic transducer
- For alternating current 50 - 60 Hz
- Class 0.5

Description

The instruments have 2 independent moving coil movements to measure the frequency for example between 2 generators or one generator and the net. These instruments are made of a moving coil movement with electronic transducer. The meter movements are jewelled and shock-proofed by sprung storage of jewels.

The indication is mainly independent of curves, form errors and fluctuations of the measuring voltage.

Admissible change in rating voltage: $\pm 20\%$


External magnet field: 0.5 mT

Technical Features

Type	FAD96n
Front frame (mm)	96 x 96
Scale length (mm)	2 x 54
Consumption	max 3
Voltage (V)	
100	●
110	●
230	●
400	●
500	○
Terminal covers	●


● available ○ on request

Connection diagrams



Dimensions in mm / Weight in gramme

Type	a	c	d	e	g	h	Ø	Weight
FAD96n	96	53	64	92 ^{+0,8}	26	5,5	M4	260

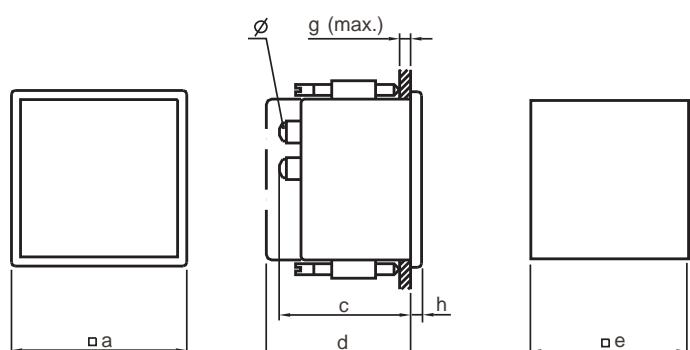

ANALOGUE MEASURING INSTRUMENTS

PQ / PAQ - Moving coil instruments



- For DC voltage / current
- Class 1.5
- PQ scale 90°
- PAQ scale 240°

Description

Moving-coil panel meters are suitable for measuring DC currents and voltages. Their main feature is their low power consumption. Connected to measuring transducers and with suitable dial, they can be used for measurement in other quantities. For currents above 100A they must be connected through a shunt. In this case, the instruments are adjusted for a copper twin-wire connection cable. Self-shielding moving-coil system, with core magnet and hair-springs for the creation of the restoring torque. Pivot suspension with spring loaded jewel bearings for vibration and shock resistance.

Electrical data

Continuously	1.2 times
Short duration	10x I_N 5 s for ammeters 2x U_N 5 s for voltmeters

Scales

90° (PQ..n) or 240° (PAQ..n) scales, practically linear. Coarse-fine division.


Internal resistance, consumption approx. in Ohm				
Measuring range	PQ35p	PQ ..n	PAQ ...n	
μ A	25		240 mV	
	40		374 mV	
	60	200 mV	600 mV	
	100	200 mV	400 mV	
	150	200 mV	600 mV	
	250	200 mV	140 mV	810 mV
	400	200 mV	540 mV	900 mV
	600	200 mV	540 mV	900 mV
	1	200 mV	37 mV	490 mV
	1,5	200 mV	60 mV	425 mV
mA	2,5	200 mV	60 mV	760 mV
	4	200 mV	60 mV	950 mV
	6	200 mV	60 mV	60 mV
	4-20	200 mV	1,5 V	1,5 V
	10-800	200 mV	60-70 mV	60-125 mV
A	1-100	15A 200 mV	60-100 mV	60 mV
	.../60...150mV	12 Ω	5 mA	67/200 Ω /V
mV	15-40	1000 Ω /V	200 Ω /V	67 Ω /V
	15-40	1000 Ω /V	200 Ω /V	67 Ω /V
	60-100	1000 Ω /V	1000 Ω /V	67 Ω /V
	150-600	1000 Ω /V	1000 Ω /V	200 Ω /V
	750	1000 Ω /V	1000 Ω /V	200 Ω /V
V	1	1000 Ω /V	1000 Ω /V	200 Ω /V
	1,5-600	1000 Ω /V	1000 Ω /V	1000 Ω /V

ANALOGUE MEASURING INSTRUMENTS


Standard Measuring Ranges	
DC Voltage	DC Current
15 mV	100 μ A
25 mV	150 μ A
40 mV	250 μ A
60 mV	400 μ A
100 mV	600 μ A
150 mV	1 mA
250 mV	1,5 mA
400 mV	2,5 mA
600 mV	4 mA
1 V	6 mA
1,5 V	10 mA
2,5 V	15 mA
4 V	20 mA
6 V	25 mA
10 V	40 mA
15 V	60 mA
25 V	100 mA
40 V	150 mA
60 V	250 mA
100 V	400 mA
150 V	500 mA
250 V	600 mA
300 V	1 A
400 V	1,5 A
500 V	2,5 A
600 V	4 A
	6 A
	10 A
	15 A
	25 A (except PQ35n)
	40 A (except PQ35n)
	60 A (except PQ35n)
	100 A (except PQ48n/PQ35n)
For connection to shunt	Standard signals
.../60 mV secondary	20 mA
.../150 mV secondary	4-20 mA
.../300 mV secondary	1 mA

Connection diagrams

Ammeter




Voltmeter



Dimensions in mm / Weight in gramme

Type	a	c	d	e	g	h	\emptyset	Weight
PQ 48n < 5... 60 A	48	70	73	45 ^{+0,6}	28	5	M6	205
others	48	55	62	45 ^{+0,6}	28	5	M4	150
PQ 72n > 60 A	72	81	-	68 ^{+0,7}	8 ¹	5	M8	285
5... < 60 A	72	70	75	68 ^{+0,7}	8 ¹	5	M6	265
others	72	55	75	68 ^{+0,7}	8 ¹	5	M4	210
PQ 96n > 60 A	96	81	-	92 ^{+0,8}	8 ¹	5	M8	350
5... < 60 A	96	70	75	92 ^{+0,8}	8 ¹	5	M6	330
others	96	55	75	92 ^{+0,8}	8 ¹	5	M4	275
PQ 144n > 60 A	144	81	-	138 ⁺¹	40	8	M8	505
5... < 60 A	144	70	75	138 ⁺¹	40	8	M6	485
others	144	53	64	138 ⁺¹	40	8	M4	430
PAQ 48n 10... 40 A	48	70	73	45 ^{+0,6}	26	5	M6	230
others	48	53	64	45 ^{+0,6}	26	5	M4	210
PAQ 72n > 60 A	72	78	-	68 ^{+0,7}	40	5	M8	320
6... < 60 A	72	68	-	68 ^{+0,7}	40	5	M6	385
others	72	53	64	68 ^{+0,7}	40	5	M4	290
PAQ 96n > 60 A	96	78	-	92 ^{+0,8}	40	5	M8	395
6... < 60 A	96	68	-	92 ^{+0,8}	40	5	M6	460
others	96	53	64	92 ^{+0,8}	40	5	M4	370
PAQ 144n > 60 A	144	78	-	138 ⁺¹	40	8	M8	680
6... < 60 A	144	68	-	138 ⁺¹	40	8	M6	720
others	144	53	64	138 ⁺¹	40	8	M4	650

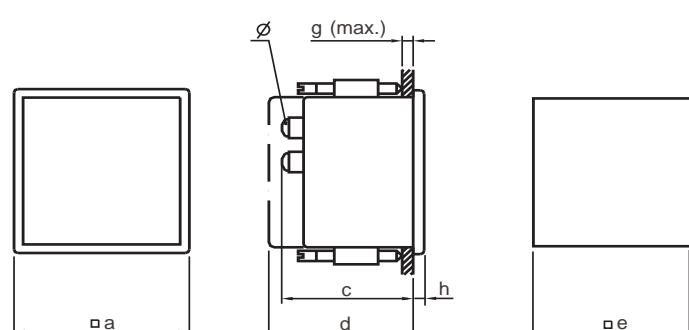

ANALOGUE MEASURING INSTRUMENTS

Instruments with contacts

The contact instruments combine an electronic relay with a measuring instrument. They can be used in a wide range of applications, including all those cases in which it is required to control a quantity within a specified range of values.

There are different types, in order to control:

- Direct current or voltage (type PQC)
- Alternating current or voltage (type EQC)

There are different versions, according to the control type:

- Different type (.../1): They have one control channel for controlling the minimum value, and another one for the maximum value.
- Cascade type (.../2): They have two control channels, for two maximum set points..

Each channel is completely independent, and controls an output relay, with potential-free change-over contacts. The set point is adjusted by means of a potentiometer at the rear side of the instrument, between 0 and 100% of the measuring instrument. With a second potentiometer it is possible to set a time delay from 0 to 30 seconds, since the set point limit is reached till the tripping of the relay. This is optically signalled by a red LED on the dial of the instrument. The delays are not accumulative, so that an oscillation around the set point does not cause the tripping, unless its period be long enough.

Each instrument combines an electromechanical measuring system and an electronic circuit for the control of the output relays. The measuring system are:

- EQC: Moving iron system, with silicone oil damping.
- PQC: Self-shielded moving coil system, with core magnet.


All of them use hairsprings for the creation of the restoring torque, and pivot suspension with spring loaded jewel bearings for vibration and shock resistance.

Versions

Differentiated regulation: (.../1)

(Minimum contact at 50 % and maximum contact at 80 %)


As long as the pointer is in the working range, e.g. the measuring value is higher than 50 % and less than 80 % both channels and both illuminating diodes on the scale are inactivated. If the measuring value sinks under 50 % e.g. the pointer is between 0 and 50 % so the channel I is activated, the minimum contact has switched and the illuminating diode on the scale is lighting. If the measuring value is higher than 80 % and 100 % so the channel II is activated, the maximum contact has switched and the illuminating diode for channel II is lighting while channel I is inactivated again.




Step regulation : (.../2)

(2 maximum contact at 50 % and at 80 %)

The working range is between 0 and 50 % of the scale. If the measuring value is under 50 % both channels and illuminating diodes are inactivated and the first maximum contact was switched on. If the measuring value reaches 80 % or more both channels are activated, e.g. also channel II is switched on and both illuminating diodes are lighting.



Rear view:

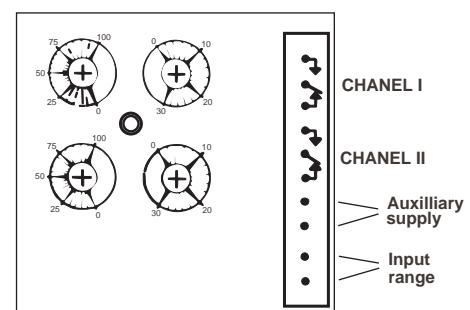

EQC:	EQC 96s/1	1 max. and 1 min. contact
	EQC 96s/2	2 max. (or 2 min.) contacts
PQC:	PQC 96s/1	1 max. and 1 min. contact
	PQC 96s/2	2 max. (or 2 min.) contacts
ISE/2:	1 contact, switches at wrong phase sequence	

ANALOGUE MEASURING INSTRUMENTS

EQC96n - Moving iron instrument with electronic limit control



- For AC current and AC voltage
- Class 1,5

Backside adjustment

Description

Moving-iron movement with silicone oil damping with an additionally electronic limit control. Pivot suspension with spring loaded jewel bearings for vibration and shock resistance.

Auxilliary supply: 230 V \sim \pm 10 % (50-60 Hz)

other voltages on request

Output relays: 2 changeover relays, potential free

Hysteresis: 2 % of the full scale

Repetitability: 1 % of the full scale


Adjustment

with potentiometer: from 0 to 100 % of the nominal range of scale¹⁾ Tolerance \pm 5 %

Time delay: 0 to 20 sec. \pm 3 sec.


¹⁾ Nominal current input range

²⁾ Nominal 100 % for voltage inputs or ammeter without overload.




Connection diagrams

Ammeter

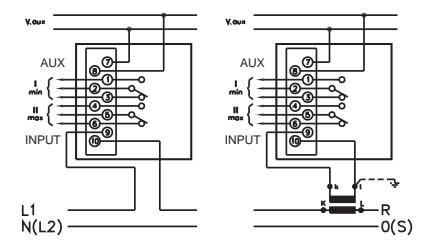

Voltmeter

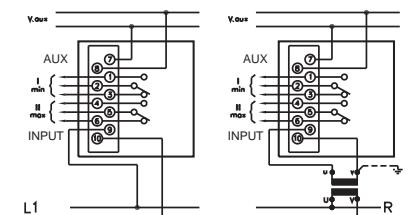

Technical Features


Type	EQC 96n/1	EQC 96n/2 max. EQC 96n/2min.
Front frame (mm)	96 x 96	96 x 96
Scale length (mm)	94	94
Weight (g)	540	540
Output relay	1 max. + 1 min.	2 max. (or 2 min)
Burden auxiliary supply (VA)	3	3

Standard Measuring Ranges

AC Voltage AC	AC Current
6 V	
10 V	100 mA
15 V	150 mA
25 V	250 mA
40 V	400 mA
60 V	600 mA
100 V	1 A
150 V	1,5 A
250 V	2,5 A
300 V	4 A
400 V	6 A
500 V	
600 V	
For voltage transformers	
.../ 100 V secundario	
.../ 110 V secundario	
For current transformers	
.../ 1 A	
.../ 5 A	

Dimensions en mm

Type	a	c	d	e	g	h	Terminals
EQC 96n	96	99	-	92 ^{+0,8}	26	5,5	Screw terminals

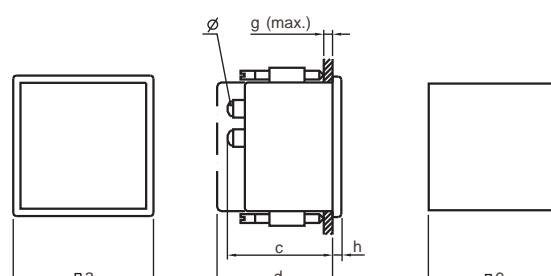

ANALOGUE MEASURING INSTRUMENTS

PQC96n - Moving coil instrument with electronic limit control



- For DC current and DC voltage
- Class 1,5

Backside adjustment

Description

Self-shielding moving-coil system, with core magnet and hairsprings for the creation of the restoring torque, with an additionally electronic limit control. Pivot suspension with spring loaded jewel bearings for vibration and shock resistance.

Características Técnicas			
Type	PQC 96n/1	PQC 96n/2 max. PQC 96n/2min.	
Front frame (mm)	96 x 96	96 x 96	
Scale length (mm)	94	94	
Weight (g)	540	540	
Output relay	1 max. + 1 min.	2 max. (or 2 min)	
Burden auxiliary supply (VA)	3	3	

Auxilliary supply: 230 V ~ \pm 10 % (50-60 Hz) other voltages
on request

Output relays: 2 changeover relays, potential free

Hysteresis: 2 % of the full scale


Repeatability: 1 % of the full scale

Adjustment


with potentiometer: from 0 to 100 % of the nominal range of scale¹⁾ Tolerance $\pm 5\%$

Time delay: 0 to 30 sec. \pm 3 sec. Tolerance \pm 5 %

Connection diagrams

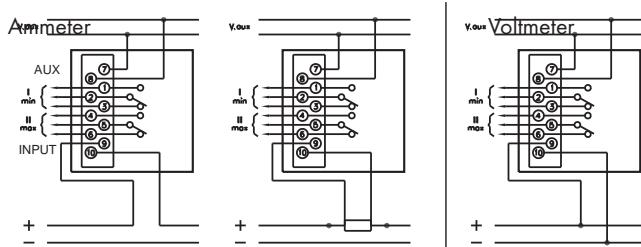

Dimensions

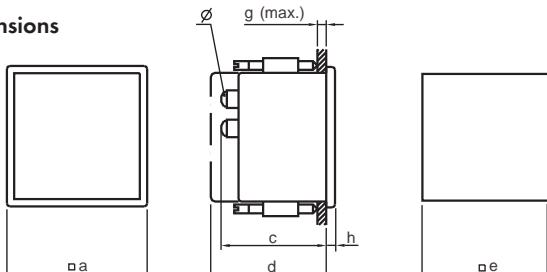

Standard Measuring Ranges			
DC Voltage		DC Current	
40 mV	5 V	20 µA	4 mA
50 mV	6 V	25 µA	5 mA
60 mV	10 V	40 µA	6 mA
100 mV	15 V	50 µA	10 mA
150 mV	25 V	60 µA	15 mA
250 mV	40 V	100 µA	20 mA
300 mV	50 V	150 µA	25 mA
400 mV	60 V	200 µA	40 mA
500 mV	100 V	300 µA	50 mA
600 mV	150 V	400 µA	60 mA
800 mV	250 V	500 µA	1 A
1 V	300 V	600 µA	1,5 A
1,5 V	400 V	1 mA	2,5 A
2,5 V	500 V	1,5 mA	4 A
		2,5 mA	5 A
For connection to shunt		Standard signals	
.../ 60 mV		20 mA	
.../ 150 mV		4-20 mA	
		1 mA	

Dimensions in mm							
Type	a	c	d	e	g	h	Terminals
POC 96n	0.6	0.0		0.2 +0.8	2.6	5.5	screw terminals



Celsa Messgerate España S.L.
Els Francs 7
46116 Masias-Moncada
(Polígono Industrial Moncada II)
Valencia- España
Telephone: +34 961 309 378
Web: www.celsamessgerate-spain.com
Email: info@celsaspain.com