

CURRENT TRANSFORMERS

IBG



IBG




IBG/1

WINDOW TYPE CURRENT TRANSFORMER

For round conductor \varnothing 40 mm the type IBG/1 is available.

Round conductor	IBG: \varnothing 30 mm
	IBG/1: \varnothing 40 mm
Primary bar	40 x 10 mm
Dimensions:	105 x 76 x 38 mm

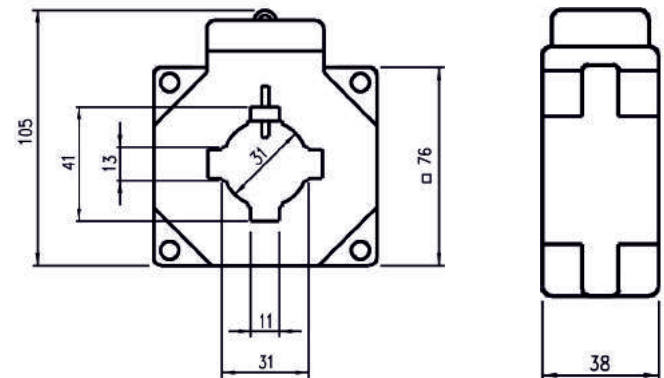

IBG Technical Features, Executions

Primary rated current A	sec. 5 A or 1 A/ Rated burdens VA		
	Class 0,5	Class 1	Class 3
150	-	2,5	5
200	-	5	5
250	2,5	5	5
300	3,75	5	7,5
400	3,75	5	10
500	5	7,5	10
600	5	7,5	10
750	5	7,5	10
800	7,5	7,5	10
1000	10	10	15

Included: Primary busbar (except IBG/1)

Accessories: mounting feet / Snap on mounting EN 50022-35


IBG-50

WINDOW TYPE CURRENT TRANSFORMER

The rated burden of this current transformer is higher than the type IBG.



Round conductor:	\varnothing 30 mm
Primary bar:	40 x 10 mm
Dimensions:	105 x 76 x 50 mm

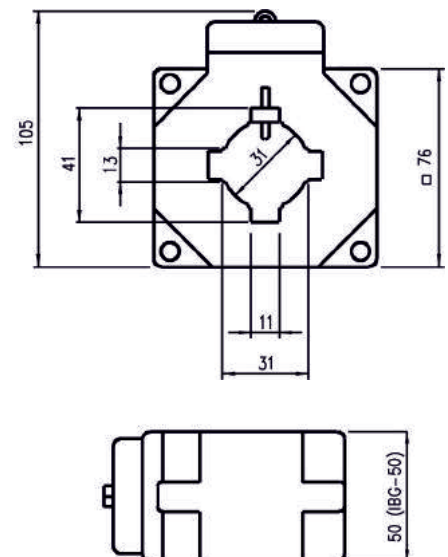

IBG-50 Technical Features, Executions

Primary rated current A	sec. 5 A or 1 A/ Rated burdens VA		
	Class 0,5	Class 1	Class 3
150	2,5	5	10
200	3,75	7,5	10
250	3,75	7,5	10
300	5	7,5	15
400	10	10	20
500	10	15	20
600	10	15	20
750	10	15	20
800	10	15	15
1000	15	20	20

Included: Primary busbar

Accessories: mounting feet / Snap on mounting EN 50022-35